



Reliable Engineers & Associates

No. 4/19, Kamatchi Amman Koil West Street,
 " Sri Sai Anugraha Nivas " IInd Floor,
 Sengunthapuram, KARUR - 639 002.
 Phone :-04324 - 274070
 Mobile : 9942515890, 9965130162.

Ref :

Date :

To:-

M/S Rotary Club of Karur Angels,
 Karur.

Cost Estimation For Two Toilets

S.I No	Description	Unit	Total Qty	Rate / Unit in Rs.	Amount in Rs.	Remarks
1	Earth work Excavation	Cft	315	7	2,205/-	
2	P.C.C 1:5:10	Sqft	50	65	3,250/-	
3	UCR Masonary in mud mortor	Cft	258	35	9,030/-	
4	R.R Masonary in C.M 1:6	Cft	193	65	12,545/-	
5	Brick work in C.M 1:6	Sqft	468	130	60,840/-	
6	Plinth Filling	Cft	299	10	2,990/-	
7	Roof slab M20 Concrete with Reinforcement & centering	Cft	32.5	450	14,625/-	
8	Internal plastering in c.m 1:5	Sqft	772	20	15,440/-	
9	External plastering in c.m 1:5	Sqft	576	22	12,672/-	
10	Ceramic Floor Tiles	Sqft	155	70	10,850/-	
11	Wall Tiles	Sqft	191	60	11,460/-	
12	Step Tiles	Nos	23	100	2,300/-	
13	Colour washing internal	Sqft	581	12	6,972/-	
14	Colour washing External	Sqft	576	12	6,912/-	
15	P.P.L Sheet laying	Sqft	233	125	29,125/-	
16	Pvc Door fixing 2' 6" x 7' x 4 No	Sqft	35	120	4,200/-	

Reliaable Engineerrrs & Associates

17	Jally (R.C.C) for Vetilator (2' x 1.5' x5') + (3' x 1') 3	Sqft	15	100	1,500/-
18	Sink Arrangements	Sqft	18	60	1,080/-
19	Tap Arrangements	Nos	9	200	1,800/-
20	Urinals watta	Rft	9	70	630/-
21	Sintex tank Fixing - 1000 liter	Nos	1	4000	4,000/-
22	Front Gate fixing - 5' x 6'	Sqft	30	125	3,750/-
23	Plumping Arrangements	5%			11,000/-
24	I.W.C	Nos	2	1250	2,500/-
25	Un forceen items				2,500/-

Total Amount Rs.2,31,676/-


(Rupees Two Lakhs Thirty One Thousands Sis Hundreden Seventy Six Only)

Thanking You


Yours Faithfully,

Place : Karur
Date : 03.11.11


P.MOHAN

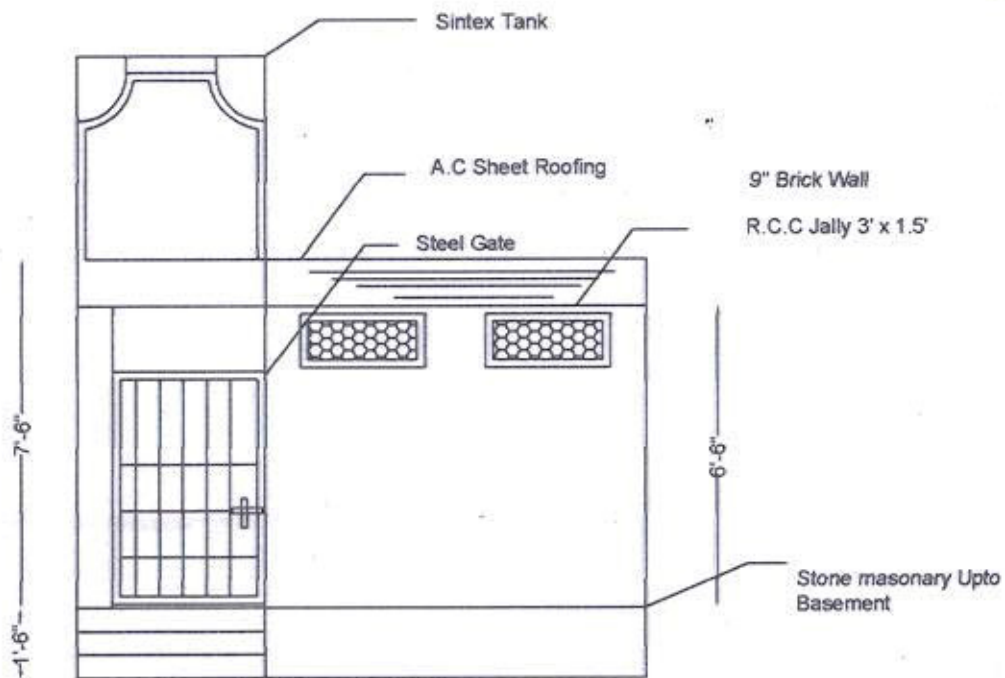

Elevation For Two Toilets

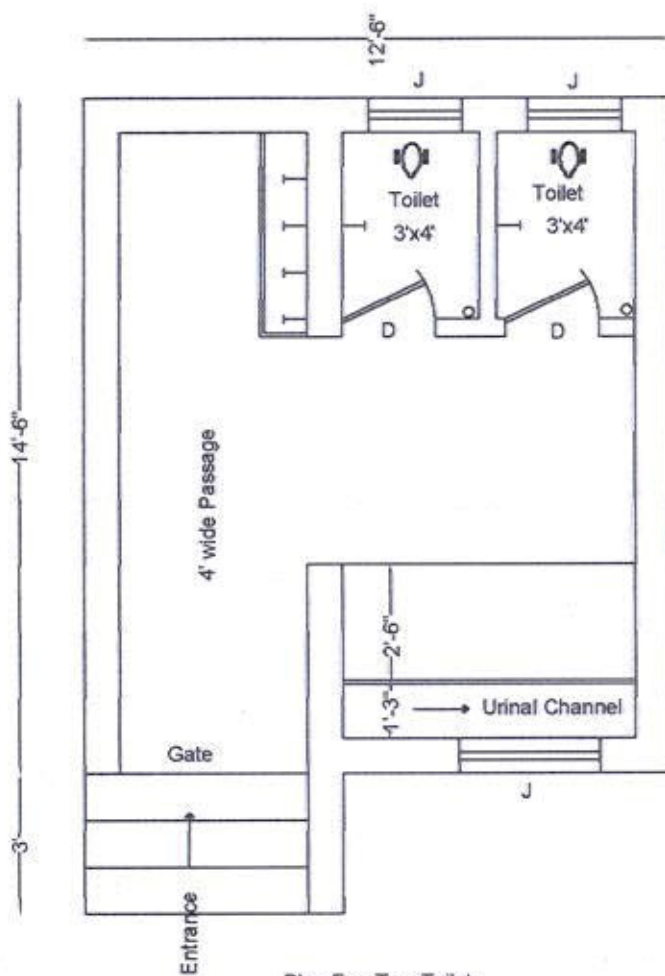

Plan For Two Toilets

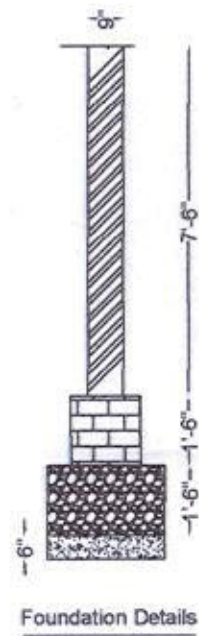

Client: Rotary Club of Karur Angels
Karur.

ENGINEER: Reliaable Engineerns & Associates ,
Karur.